


*Štiripotni mešalni ventil /  
Četveroputni miješajući ventil*



www.kovina.si


# MV 4P 15 - MV 4P 32

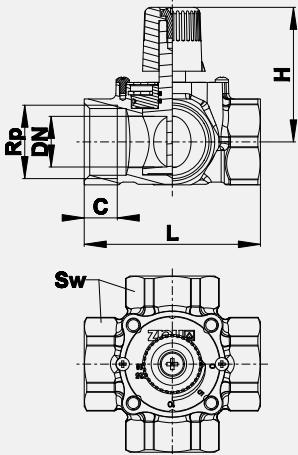

art.	ident	EAN	DN	PN	Rp	C	L	H	Kvs	Sw	■	□
MV 4P 15	1621006	3838963363873	15	10	1/2"	12	60	54,6	4	27	0,44	16
MV 4P 20	1631006	3838963363880	20	10	3/4"	13	64	56,6	6,3	31	0,47	16
MV 4P 25	1641006	3838963363897	25	10	1"	15	80	61,1	10	39	0,87	16
MV 4P 32	1651006	3838963363903	32	10	1-1/4"	18,8	90	64,8	16	49	1,12	10

Delovna temperatura / Radna temperatura: -10 °C...120 °C  
 Max. temperaturna obremenitev / Max. temperaturno opterečenje: 130 °C  
 Kot delovnega giba (vreteno) / Kut pomaka vretena: 90°  
 Vrtlini moment / Okretni moment: < 5 Nm

## MV 4P 15+MP - MV 4P 32+MP

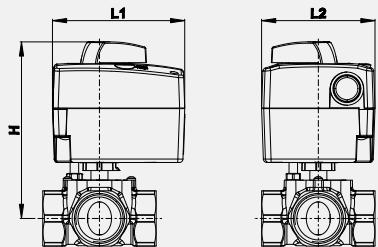

art.	ident	EAN	DN	L1	L2	H	■	□
MV 4P 15+MP	1621008	3838963363996	15	93	80	118,1	0,94	8
MV 4P 20+MP	1631008	3838963364009	20	93	80	120,1	0,97	8
MV 4P 25+MP	1641008	3838963364016	25	93	80	124,6	1,44	8
MV 4P 32+MP	1651008	3838963364023	32	93	80	128,3	1,73	8

Hitrost regulacije: 140s.