



Solid fuel products
SERIES LTC300





Series LTC341
Series LTC361


Series LTC381




LVD 2014/35/EU
EMC 2014/30/EU
RoHS 2015/863/EU
PED 2014/68/EU, article 4.3

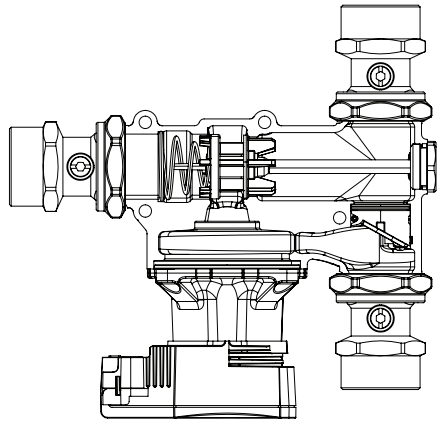


1

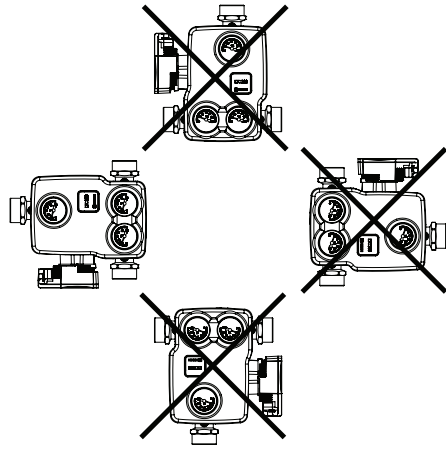


2

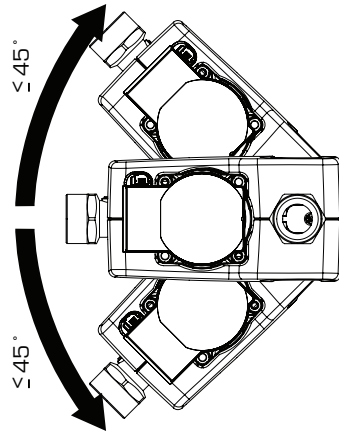




3

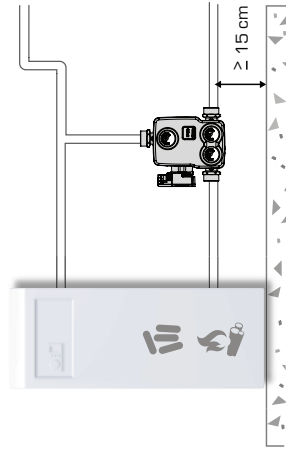




230 VAC, 50Hz

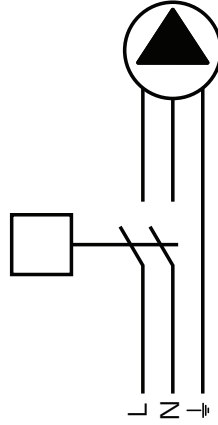


a

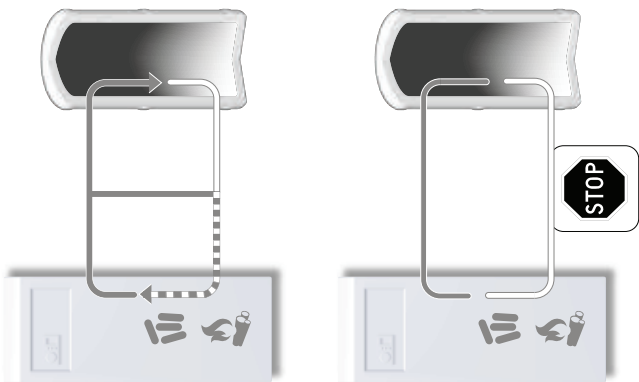




b

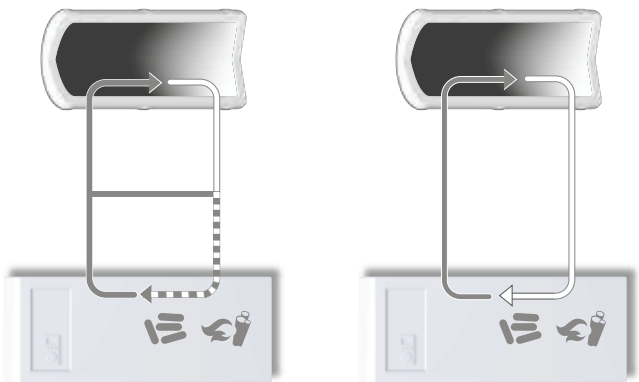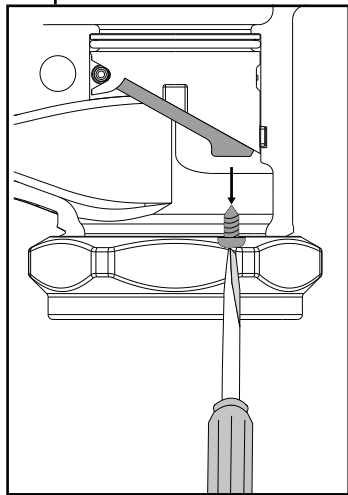

Click	LED display	Control mode	Pump curve
1		Constant speed	Recommended
2		Constant speed	
3		Variable differential pressure $\Delta p-v$	
4		Variable differential pressure $\Delta p-v$	
5		Variable differential pressure $\Delta p-v$	
6		Constant differential pressure $\Delta p-v$	
7		Constant differential pressure $\Delta p-v$	
8		Constant differential pressure $\Delta p-v$	
9		Constant speed	

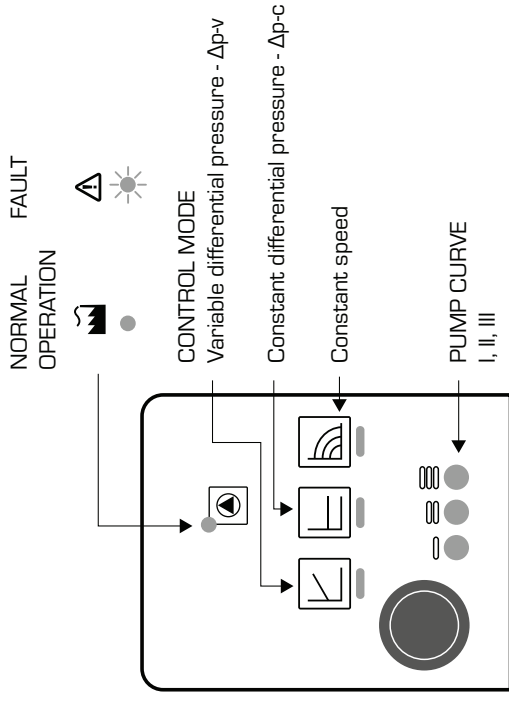

1	2	3	4
Hold	LED display	Last settings	Status
8 sec			Locked
8 sec			Unlocked
4 sec			Factory setting
3 sec			Venting

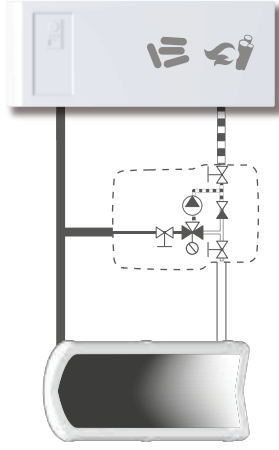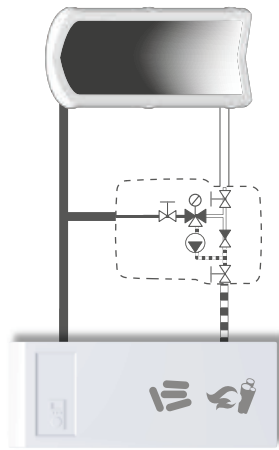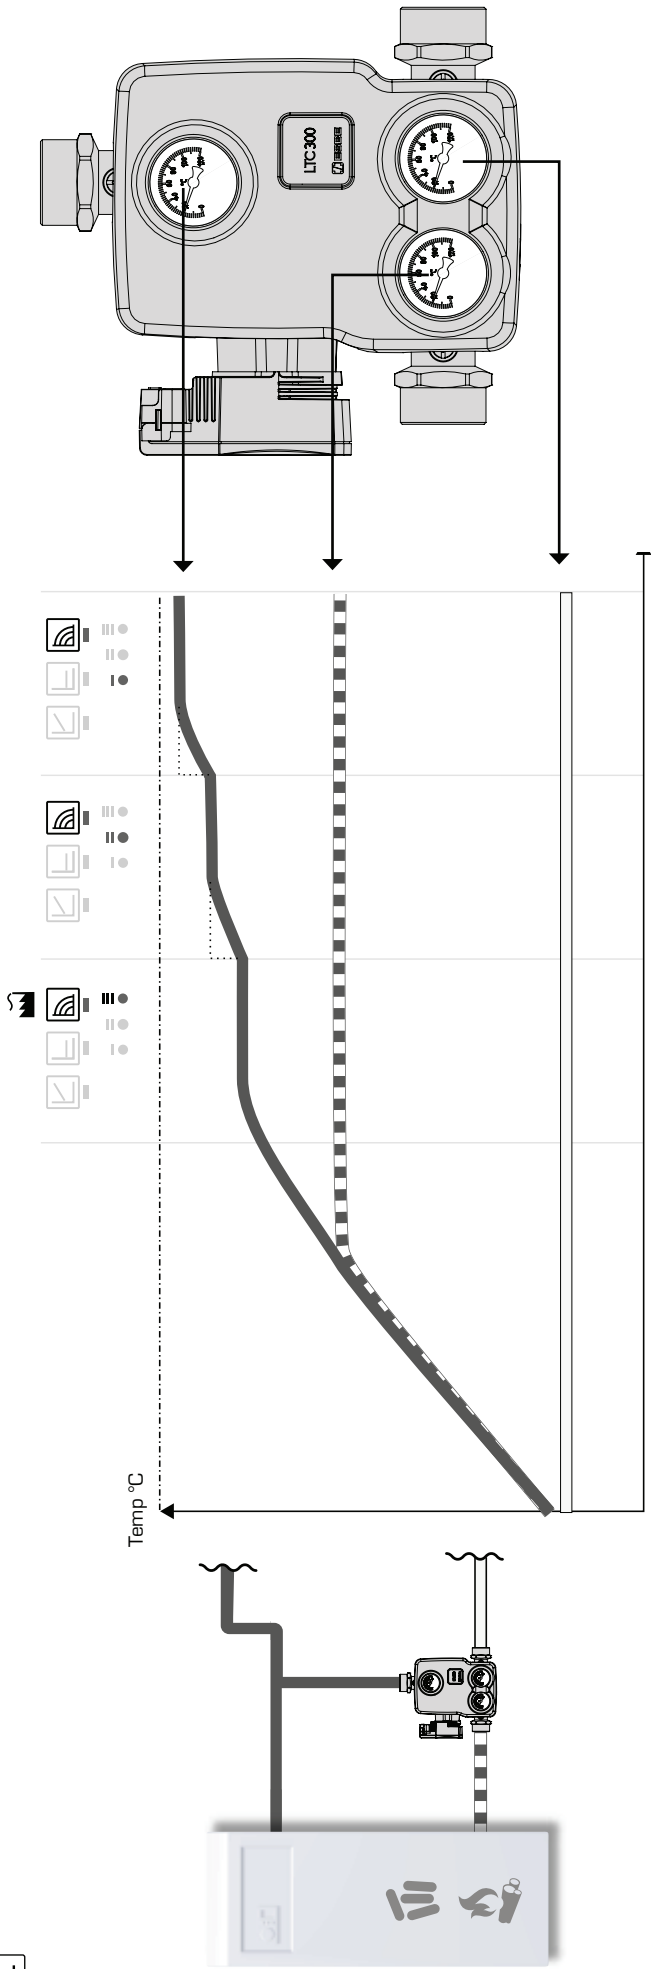

Piping Schematics are General Representations



<https://esbe.eu/group/products/solid-fuel-products/ltc300>



www.esbe.eu