

Kol. Opis

1 COMFORT 15-14 BX



Paznja! Slika proizvoda se može razlikovati od stvarnog proizvoda

Proizvodni broj: [97916772](#)

COMFORT is an efficient circulator designed for hot-water recirculation in residential buildings with a dedicated return line. It is compatible with all types of water heater tanks, tankless systems, solar or heat pumps regardless of whether the system has mixing or tampering valves installed.


The pump features a compact housing and a permanent magnet with an integrated control unit. The spherical rotor, equipped with an impeller, ensures optimal functionality supported by a robust single-bearing ball system. The drinking-water approved brass pump housing guarantees both safety and reliability.

COMFORT features the continuous operation 24/7 mode which is suitable for external control via plug-in timer, gas boiler or heat-pump controller.

The product offers:

- Q-H performance that is designed for single—and multi-family homes, depending on the required duty point to accommodate heat loss in a specific pipe layout.
- Low power consumption and silent operation.
- Compliance with pipe manufacturers' flow velocity limits, including DN 15, DN 20 PEX, copper, and others.
- Drinking-water approval, ensured by the brass pump housing, stainless-steel rotor, and composite impeller.
- A design that makes it easy to clean limescale and foreign deposits by removing the pump head, enabling the product to meet unlimited water hardness requirements.
- Dry-running protection to prevent failure if the system runs out of water.
- Multiple installation positions, even with the pump head pointing downwards.
- A pump head designed to fit brass pump housings of old and new pumps of the same design, even from different pump manufacturers (such as WILO, VORTEX, LOWARA, DAB and others).
- Easy electrical installation, which is provided by a pre-assembled power plug with a 1.5 m cable and a double insulation protection design, which eliminates the need for a ground wire.
- Insulating shells for heat loss reduction.
- Non-return and shut-off valves included in "BX" variant, reducing installation cost.
- An optional venting flange that provides a simple way to vent or drain the system without the need to install an additional venting valve permanently.
- Optional fittings for pipe connections in different sizes and types.
- Optional non-return and shut-off valves are available.


97916772 COMFORT 15-14 BX

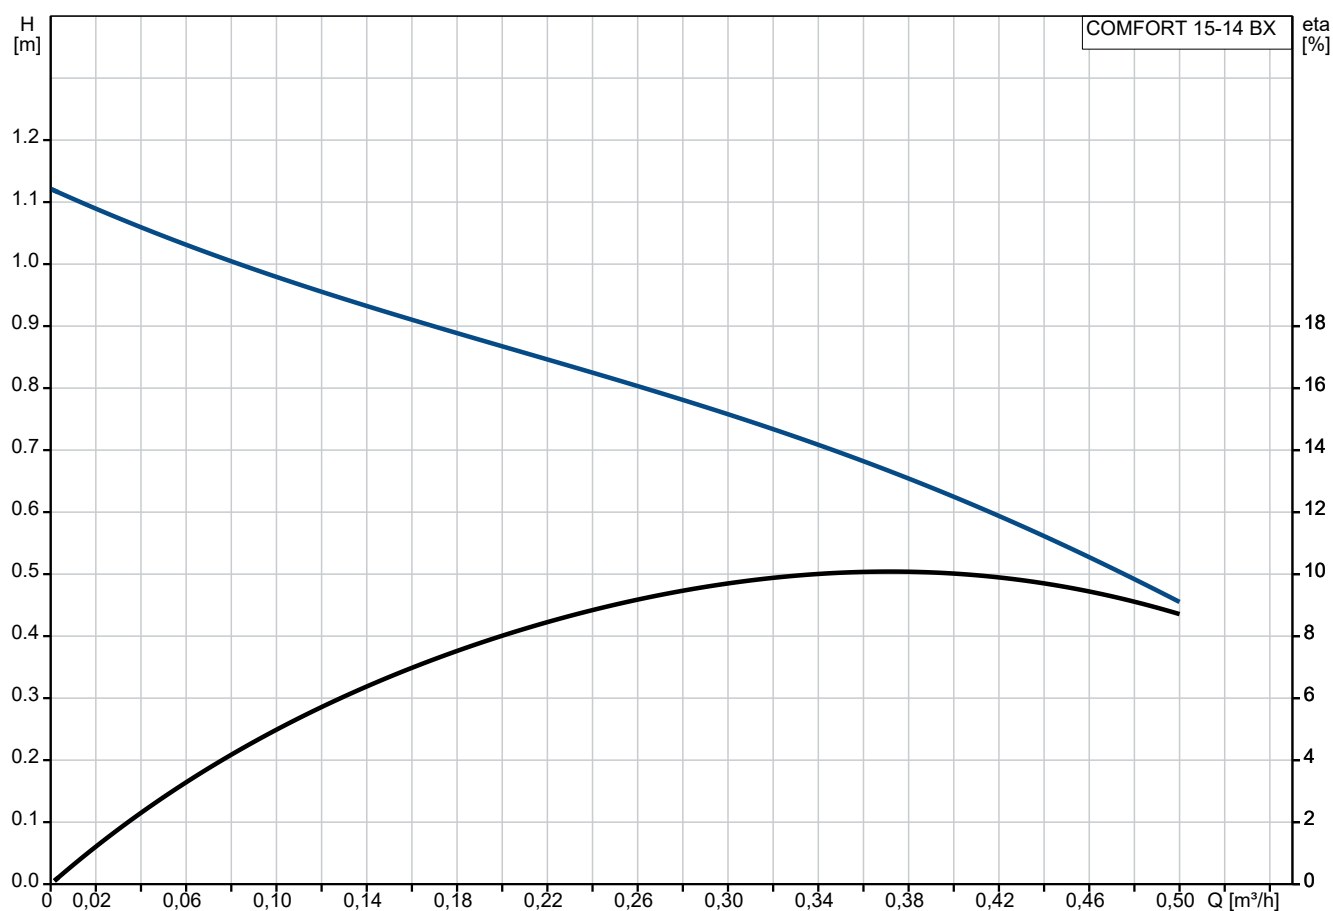


Dizana tečnost = voda

Temperatura tečnosti tokom rada = 60 °C




Gustina = 983.2 kg/m³

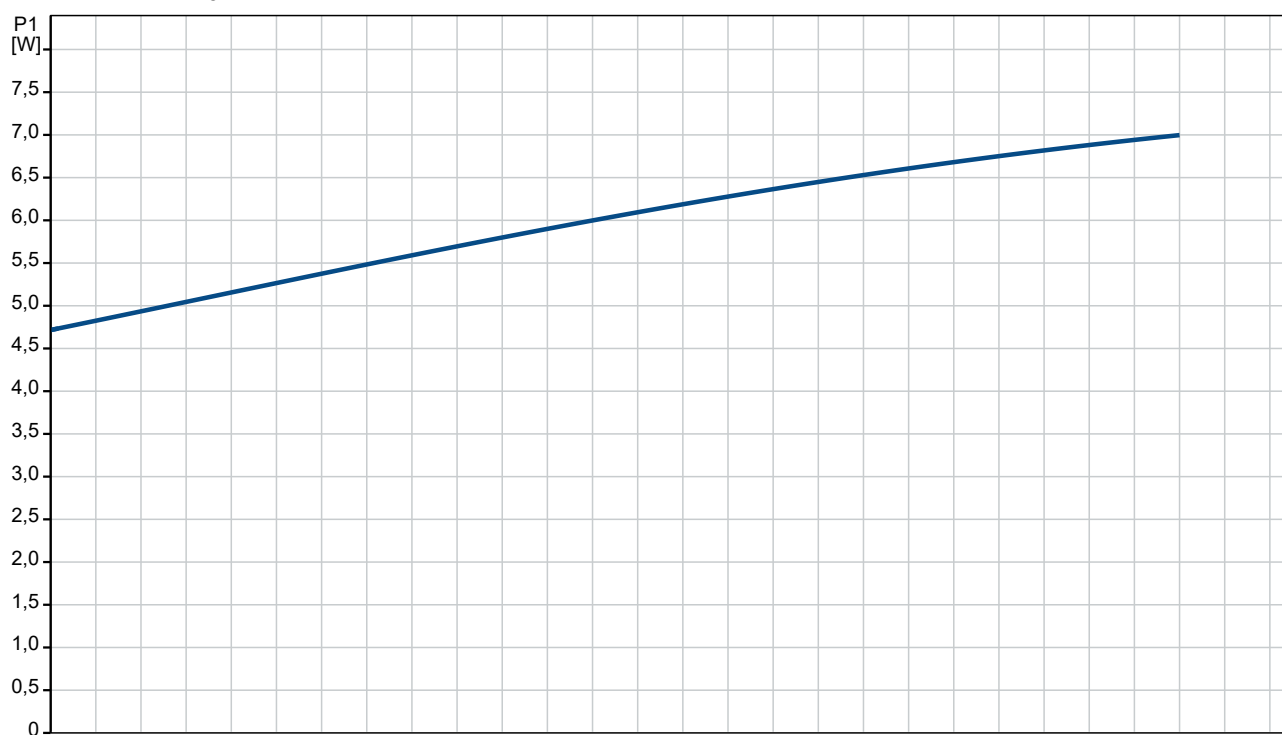


Opis	Vrednost
Opšte informacije:	
Ime proizvoda::	COMFORT 15-14 BX
Šifra proizvoda:	97916772
EAN broj::	5710626363773
Cena:	€ 222
Tehnički:	
Broj brzina:	1
Nazivni protok:	0.33 m³/h
Rated head:	0.78 m
Maximum head:	14 dm
TF klasa:	95
Approvals:	CE,VDE,EAC,WEEE
Materijali:	
Kučiste pumpe:	Mesing
Pump housing:	CuZn39Pb3, MS58
Rotor:	Kompozitni
Radno kolo:	PPO-GF20/Stainless steel
Ugradnja:	
Minimum ambient temperature:	0 °C
Maksimalni radni pritisak:	10 bar
Type of connection:	G
Size of connection:	1 inch
Pressure rating for connection:	PN 10
Port-to-port length:	140 mm
Tečnost:	
Dizana tečnost:	voda
Raspon temperature tečnosti:	2 .. 95 °C
Selected liquid temperature:	60 °C
Gustina:	983.2 kg/m³
Elektro podaci:	
Max. ulazna snaga:	7 W
Frekvencija struje:	50 / 60 Hz
Rated voltage:	1 x 230 V
Utrošak struje u brzini 3:	0.07 A
Klasa zaštite (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Built-in motor protection:	ELEKT.
Termička zaštita:	Impedansna zaštita
Kontrole:	
Operation mode include:	NIJEDAN
Ostali:	
Net weight:	1.14 kg
Gross weight:	1.24 kg
Shipping volume:	0.003 m³
Danski VVS Br.:	380635110
Swedish RSK No.:	5803086
Norwegian NRF no.:	9042116
Country of origin:	DE
Custom tariff no.:	84137030

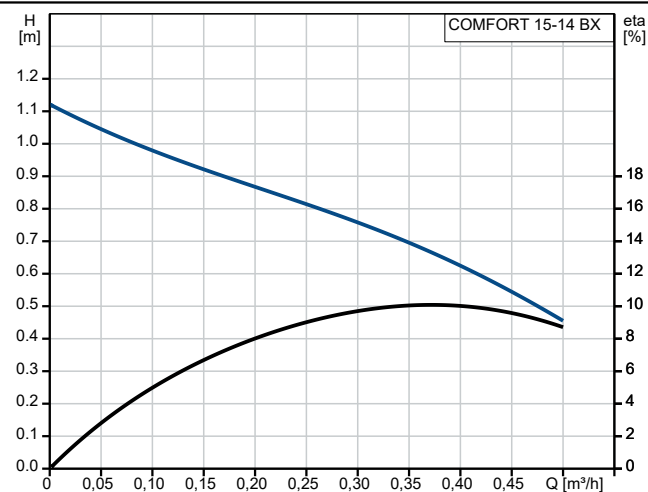

Dizana tečnost = voda
 Temperatura tečnosti tokom rada = 60 °C
 Gustina = 983.2 kg/m³

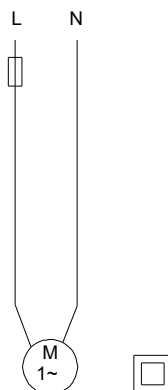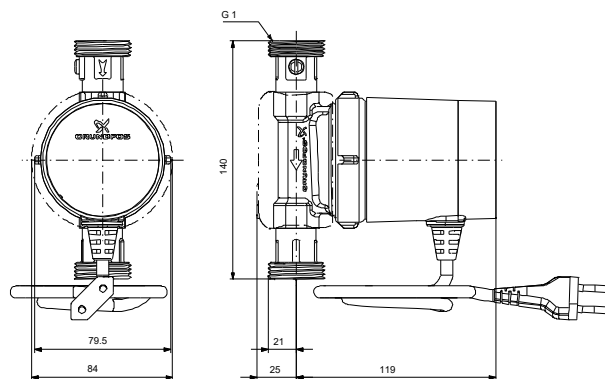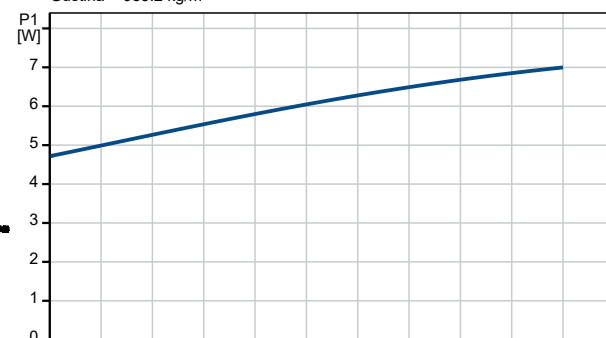

97916772 COMFORT 15-14 BX

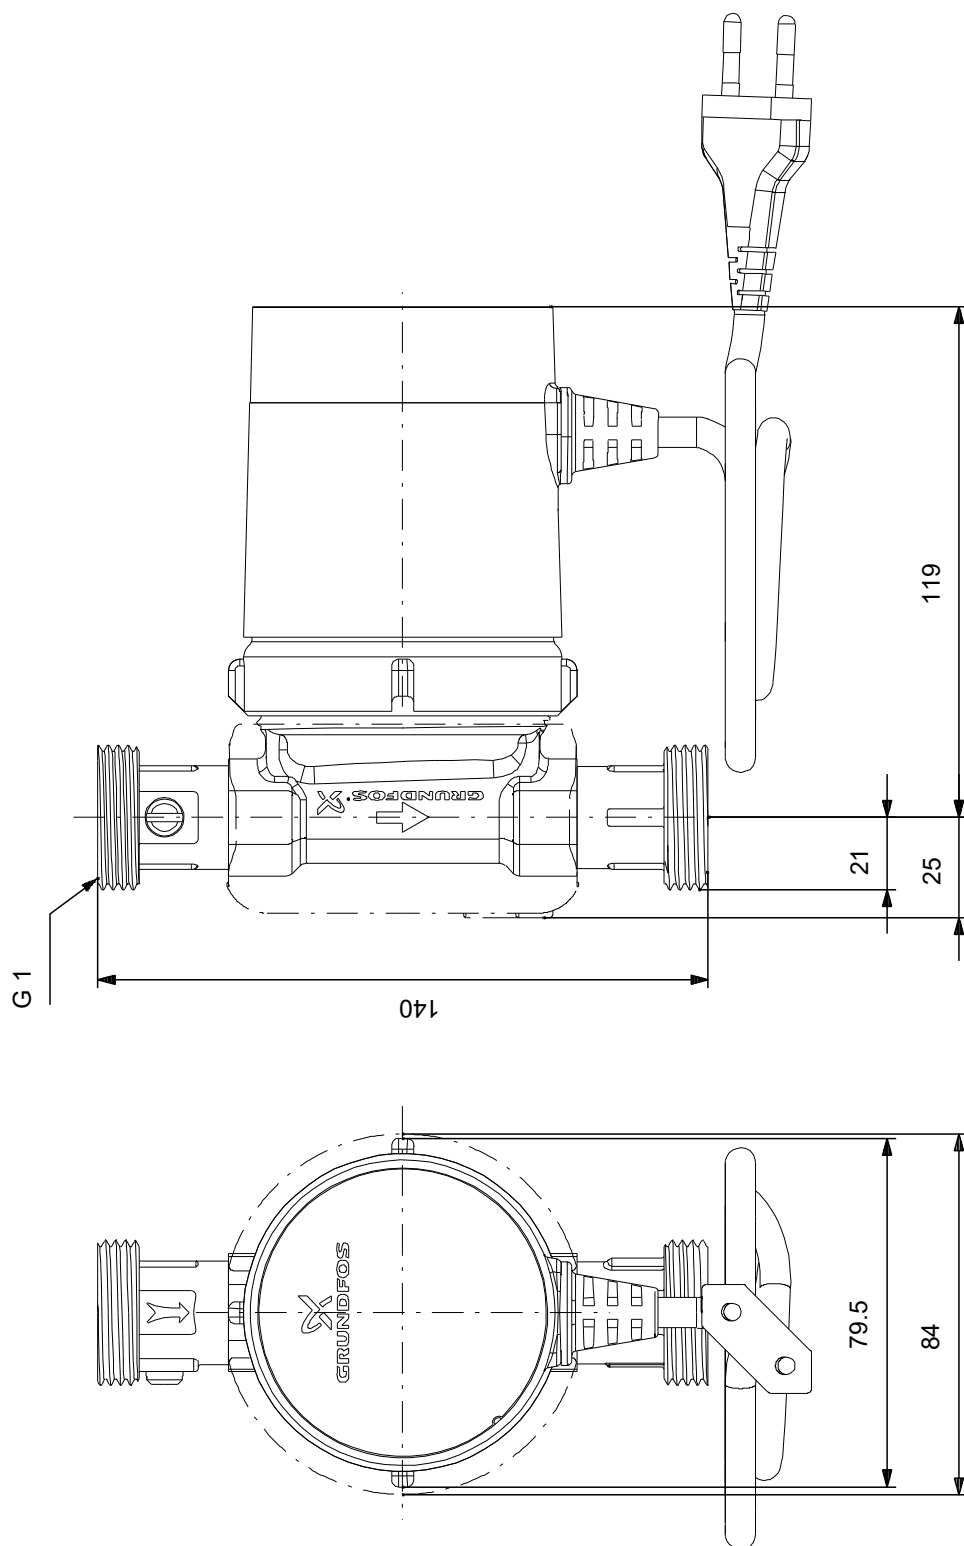

Napomena! Sve jedinice su u [mm] ukoliko drugačije nije navedeno.
Upozorenje: Ovaj pojednostavljeni dimenzioni crtež ne pokazuje sve detalje.

97916772 COMFORT 15-14 BX

