

Kol. Opis

1 COMFORT 15-14 M



Paznja! Slika proizvoda se može razlikovati od stvarnog proizvoda

Proizvodni broj: [93095662](#)



COMFORT M is an efficient replacement motor designed for domestic hot water recirculation pumps. It fits all COMFORT housings and housings of the same type from other pump manufacturers.

COMFORT features a continuous operation 24/7 mode, which is suitable for external control via a plug-in timer, gas boiler, or heat pump controller.



The product offers:

- Q-H performance that is designed for single—and multi-family homes, depending on the required duty point to accommodate heat loss in a specific pipe layout.
- Low power consumption and silent operation.
- Compliance with pipe manufacturers' flow velocity limits, including DN 15, DN 20 PEX, copper, and others.
- Drinking-water approval, ensured by the stainless-steel rotor, and composite impeller.
- A design that makes it easy to clean limescale and foreign deposits by removing the pump head, enabling the product to meet unlimited water hardness requirements.
- Dry-running protection to prevent failure if the system runs out of water.
- Multiple installation positions, even with the pump head pointing downwards.
- A pump head designed to fit brass pump housings of old and new pumps of the same design, even from different pump manufacturers (such as WILO, VORTEX, LOWARA, DAB and others).
- The design enables easy installation and removes the need to replace the pump housing and drain the system.
- Easy electrical installation, which is provided by a pre-assembled power plug with a 1.5 m cable and a double insulation protection design, which eliminates the need for a ground wire.
- Insulating shells for heat loss reduction.
- An optional venting flange that provides a simple way to vent or drain the system without the need to install an additional venting valve permanently.
- Optional fittings for pipe connections in different sizes and types.
- Optional non-return and shut-off valves are available.

Opis	Vrednost
Opšte informacije:	
Ime proizvoda::	COMFORT 15-14 M
Šifra proizvoda:	93095662
EAN broj::	5715467708059
Cena:	€ 136.35
Tehnički:	
Broj brzina:	1
Nazivni protok:	0.45 m³/h
Rated head:	0.839 m
Maximum head:	14 dm
TF klasa:	95
Approvals:	CE,VDE,WEEE
Materijali:	
Pump housing:	CuZn39Pb3, MS58
Rotor:	Kompozitni
Radno kolo:	PPO-GF20/Stainless steel
Ugradnja:	
Minimum ambient temperature:	0 °C
Maksimalni radni pritisak:	10 bar
Pipe connection standard:	ISO 228-1
Size of connection:	1/2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	80 mm
Tečnost:	
Raspon temperature tečnosti:	2 .. 95 °C
Elektro podaci:	
Max. ulazna snaga:	7 W
Frekvencija struje:	50 / 60 Hz
Rated voltage:	1 x 230 V
Utrošak struje u brzini 3:	0.07 A
Klasa zaštite (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Built-in motor protection:	ELEKT.
Termička zaštita:	Impedansna zaštita
Kontrole:	
Operation mode include:	NIJEDAN
Ostali:	
Net weight:	0.56 kg
Gross weight:	0.66 kg
Shipping volume:	0.003 m³
Prodajno područje:	DACH
Swedish RSK No.:	5830069
Country of origin:	DE
Custom tariff no.:	84137030

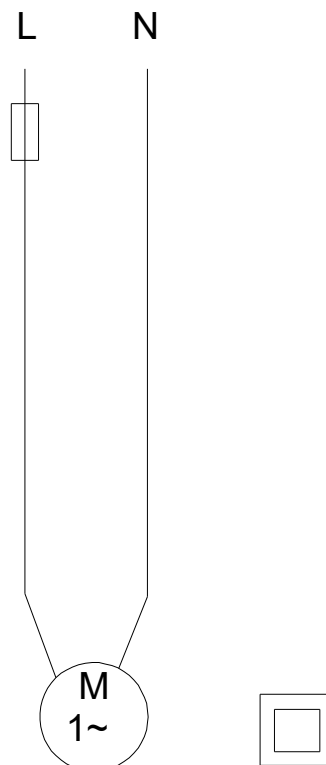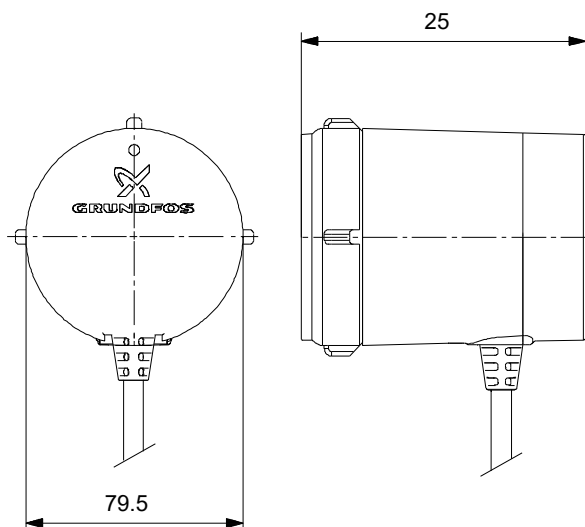

93095662 COMFORT 15-14 M

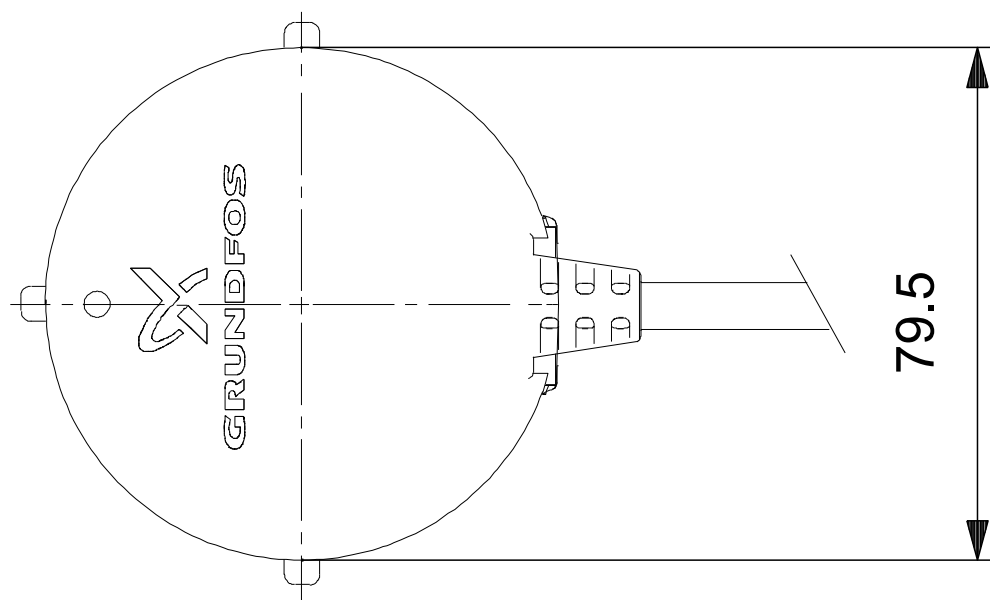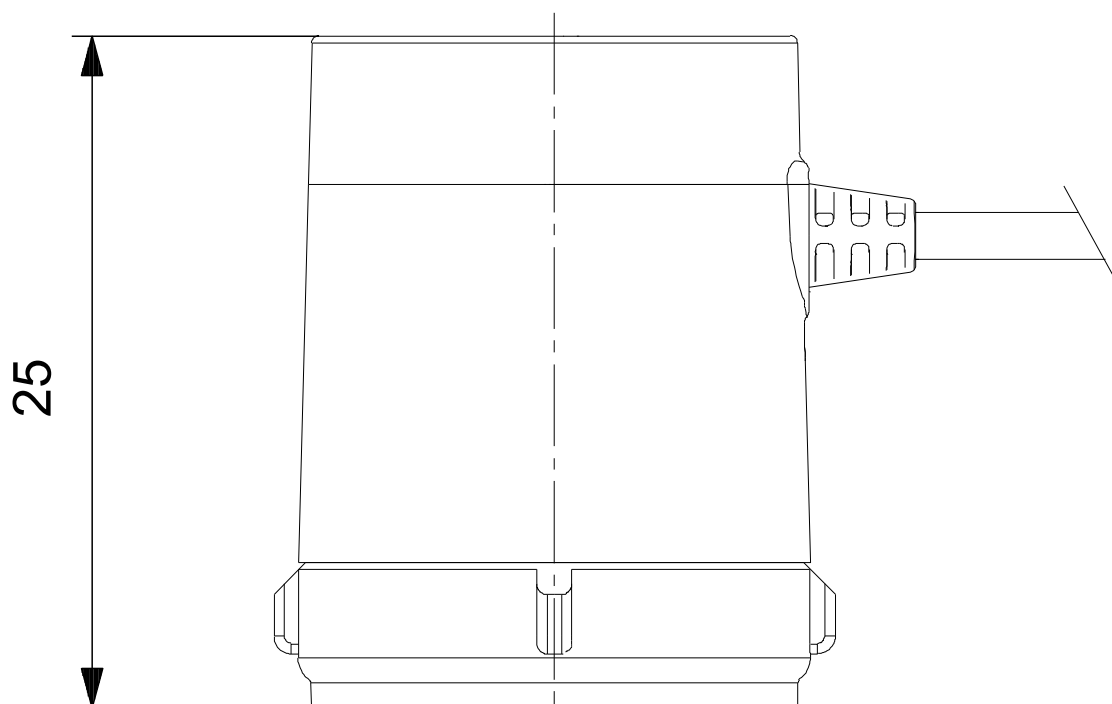

Napomena! Sve jedinice su u [mm] ukoliko drugačije nije navedeno.
Upozorenje: Ovaj pojednostavljeni dimenzioni crtež ne pokazuje sve detalje.

93095662 COMFORT 15-14 M

