

Kol. Opis

1 COMFORT 15-14 BX TA



Paznja! Slika proizvoda se može razlikovati od stvarnog proizvoda

Proizvodni broj: 97916749

COMFORT TA is an efficient circulator designed for hot-water recirculation in residential buildings with a dedicated return line. It is compatible with all types of water heater tanks, tankless systems, solar or heat pumps regardless of whether the system has mixing or tampering valves installed.

The pump features a compact housing and a permanent magnet with an integrated control unit.

The spherical rotor, equipped with an impeller, ensures optimal functionality supported by a robust single-bearing ball system.

The drinking-water approved brass pump housing guarantees both safety and reliability.

COMFORT TA moreover features a built-in temperature sensor to maintain water temperature.

The user-friendly interface features LEDs and push-buttons on the operating panel. This offers an intuitive way to display and set operating times and control modes and ensures a comfortable and energy-efficient experience for residential use.

COMFORT TA features three control modes: AUTOADAPT, temperature and continuous 24/7.

With the AUTOADAPT control mode, the pump quickly learns usage patterns throughout the day and ensures hot water is available only when needed via an external sensor on the supply pipe.

The pump can therefore differentiate between mornings, evenings, weekdays, weekends, and periods of inactivity, such as vacations, saving energy and water by allowing the pump only to operate when required.

After 24 hours of detecting no hot water usage, the pump automatically enters vacation mode and resumes operation when demand for hot water arises.

During the first two weeks after installation, the pump frequently starts based on temperature control to ensure immediate comfort until the usage pattern has been learned. The pump provides, regardless of usage pattern, instant comfort when it detects demand for hot water.

Once a week, the pump runs a 15-minute disinfection (anti-legionella) cycle. The water heater must enable that function once a week.

The temperature control mode incorporates both the external and internal sensors for more accurate water temperature measurement and activates the pump when the water temperature drops below a certain level.

The on/off temperatures are automatically adjusted based on the maximum temperature measured in the system.

The maximum temperature of the system is measured constantly, allowing dynamic adjustment of the on/off temperatures.

This mode also includes automatic vacation mode for enhanced energy efficiency which makes it ideal for vacation homes.

Continuous 24/7 control mode

Pump operates continuously 24 hours a day.


The product offers:

- Q-H performance that is designed for single—and multi-family homes, depending on the required duty point to accommodate heat loss in a specific pipe layout.
- Heat loss reduction by 67 % compared to continuously running pump.
- Low power consumption and silent operation.


Kol.	Opis
------	------

- | | |
|---|---|
| 1 | <ul style="list-style-type: none">• Compliance with pipe manufacturers' flow velocity limits, including DN 15, DN 20 PEX, copper, and others.• Drinking-water approval, ensured by the brass pump housing, stainless-steel rotor, and composite impeller.• A design that makes it easy to clean limescale and foreign deposits by removing the pump head, enabling the product to meet unlimited water hardness requirements.• Dry-running protection to prevent failure if the system runs out of water.• Multiple installation positions, even with the pump head pointing downwards.• A pump head designed to fit brass pump housings of old and new pumps of the same design, even from different pump manufacturers (such as WILO, VORTEX, LOWARA, DAB and others).• Easy electrical installation, which is provided by a pre-assembled power plug with a 1.5 m cable and a double insulation protection design, which eliminates the need for a ground wire.• Insulating shells for heat loss reduction.• Non-return and shut-off valves included in "BX" variant, reducing installation cost.• An optional venting flange that provides a simple way to vent or drain the system without the need to install an additional venting valve permanently.• Optional fittings for pipe connections in different sizes and types.• Optional non-return and shut-off valves are available. |
|---|---|


97916749 COMFORT 15-14 BX TA

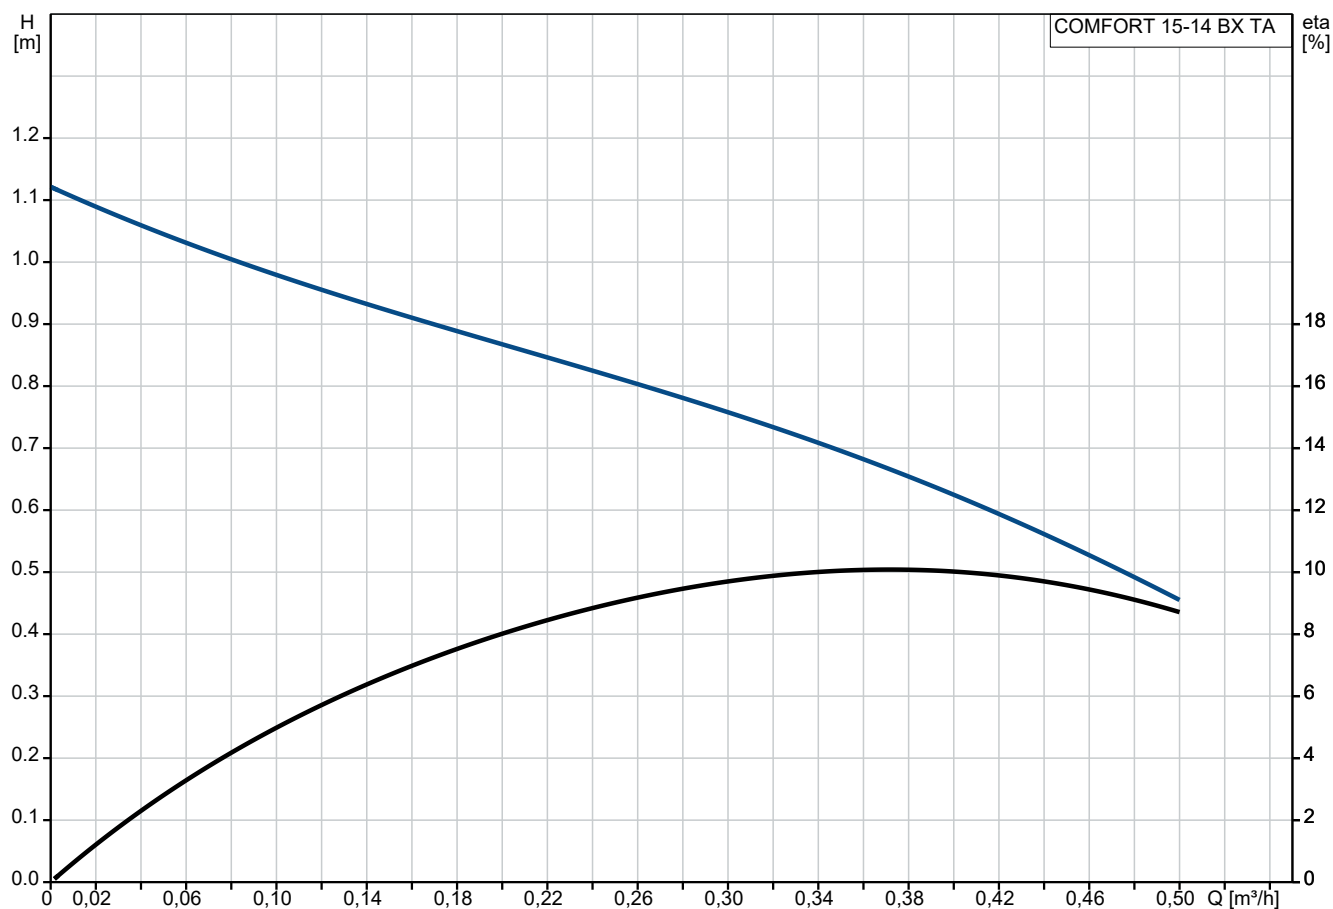




Dizana tečnost = voda
 Temperatura tečnosti tokom rada = 60 °C
 Gustina = 983.2 kg/m³

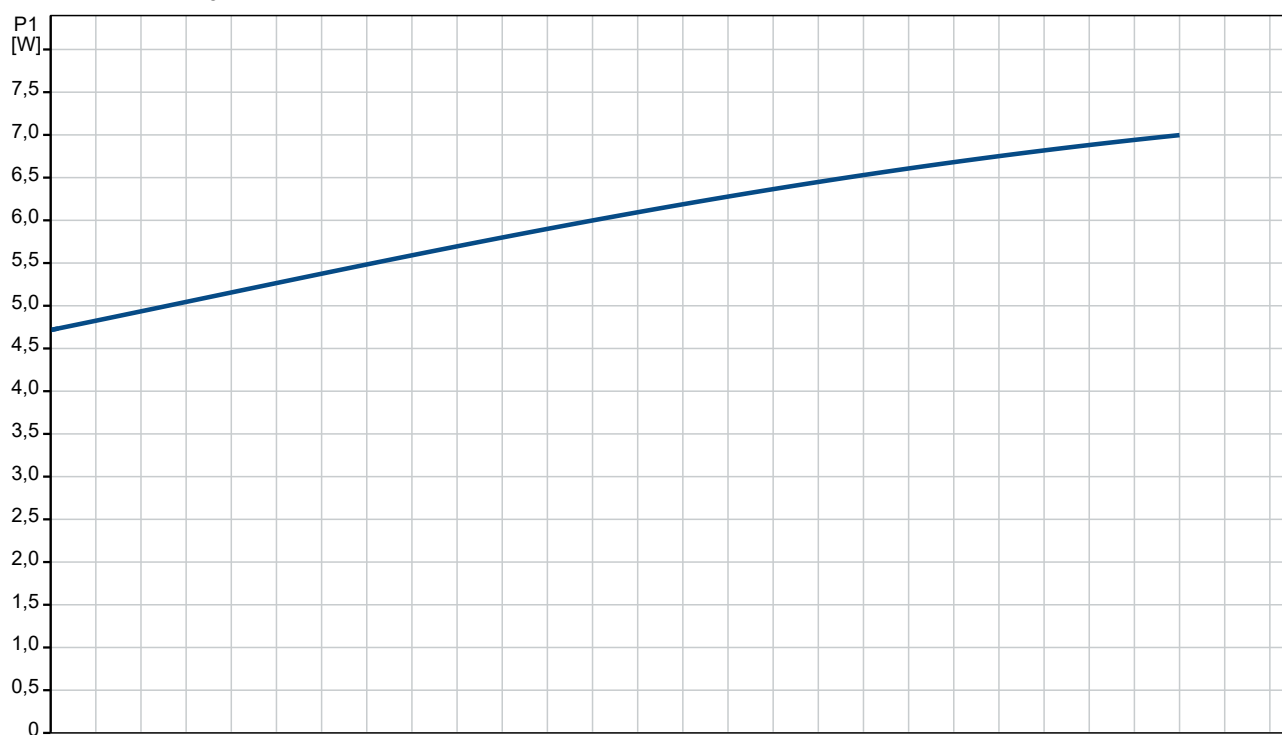


Opis	Vrednost
Opšte informacije:	
Ime proizvoda:	COMFORT 15-14 BX TA
Šifra proizvoda:	97916749
EAN broj:	5710626363742
Cena:	€ 352
Tehnički:	
Broj brzina:	1
Nazivni protok:	0.33 m³/h
Rated head:	0.78 m
Maximum head:	14 dm
TF klasa:	95
Approvals:	CE, VDE, EAC, WEEE
Materijali:	
Kučiste pumpe:	Mesing
Pump housing:	CuZn39Pb3, MS58
Rotor:	Kompozitni
Radno kolo:	PPO-GF20/Stainless steel
Ugradnja:	
Minimum ambient temperature:	0 °C
Maksimalni radni pritisak:	10 bar
Type of connection:	G
Size of connection:	1 inch
Pressure rating for connection:	PN 10
Port-to-port length:	140 mm
Tečnost:	
Dizana tečnost:	voda
Raspon temperature tečnosti:	2 .. 95 °C
Selected liquid temperature:	60 °C
Gustina:	983.2 kg/m³
Elektro podaci:	
Max. ulazna snaga:	7 W
Frekvencija struje:	50 / 60 Hz
Rated voltage:	1 x 230 V
Utrošak struje u brzini 3:	0.07 A
Klasa zaštite (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Built-in motor protection:	ELEKT.
Termička zaštita:	Impedansna zaštita
Kontrole:	
Operation mode include:	Temperatura
Ostali:	
Net weight:	1.18 kg
Gross weight:	1.28 kg
Shipping volume:	0.003 m³
Danski VVS Br.:	380635120
Swedish RSK No.:	5803087
Norwegian NRF no.:	9042117
Country of origin:	DE
Custom tariff no.:	84137030

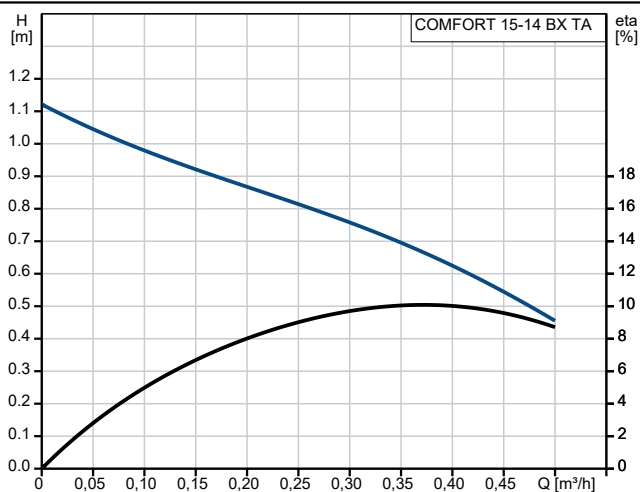

Dizana tečnost = voda
Temperatura tečnosti tokom rada = 60 °C
Gustina = 983.2 kg/m³

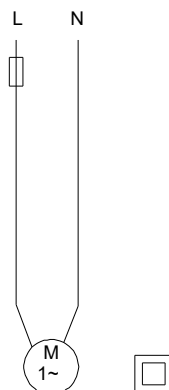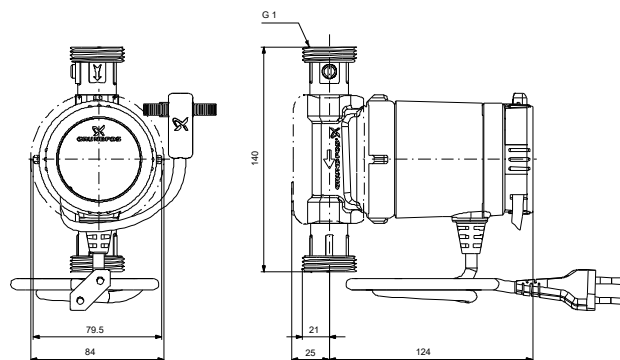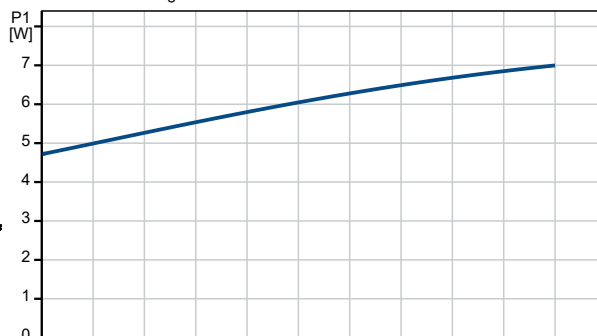

97916749 COMFORT 15-14 BX TA

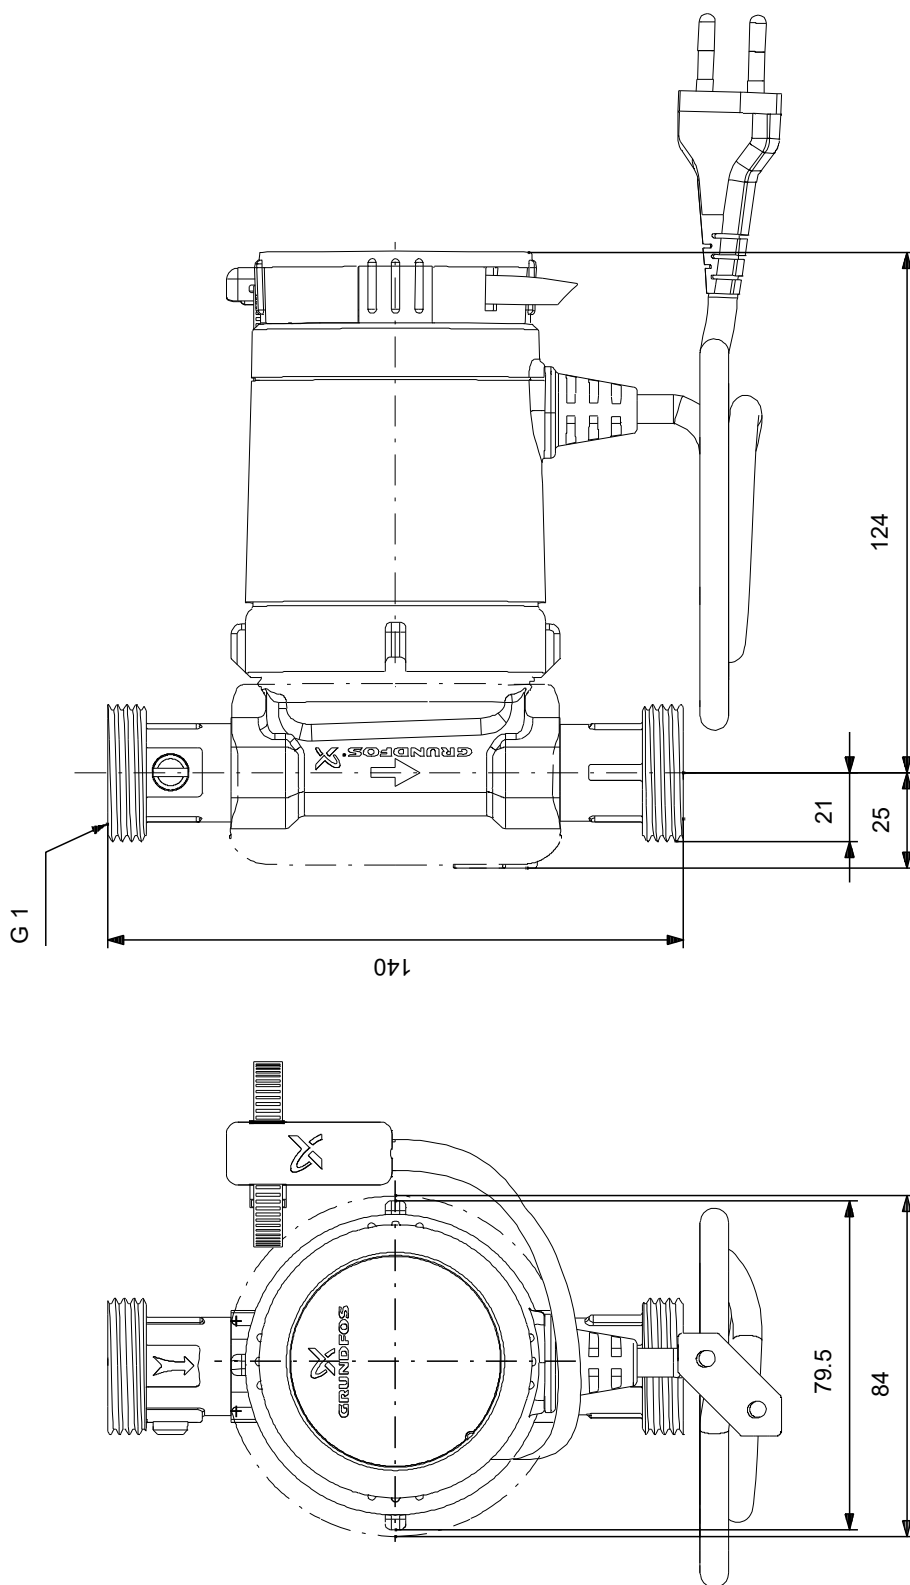

Napomena! Sve jedinice su u [mm] ukoliko drugačije nije navedeno.
Upozorenje: Ovaj pojednostavljeni dimenzioni crtež ne pokazuje sve detalje.

97916749 COMFORT 15-14 BX TA

