

Buffer tanks

without heat exchangers



800 L
to
2000 L



MODEL		TESY V 800 99 P4	TESY V 1000 99 P4	TESY V 1500 120 P4	TESY V 2000 130 P4
Art.number	Nº	306404	306405	303893	303894
Capacity	L	805	902	1476	1904
Net weight	kg	107	116	216	258
Insulation	mm	100	100	100	100
Heat losses ΔT45K	W	128	136	158	183
Energy efficiency class		C	C	C	C
Maximum operational temperature	°C	95	95	95	95
Rated pressure	bar	3	3	3	3

Buffer tanks |

without heat exchangers | 800 L to 2000 L

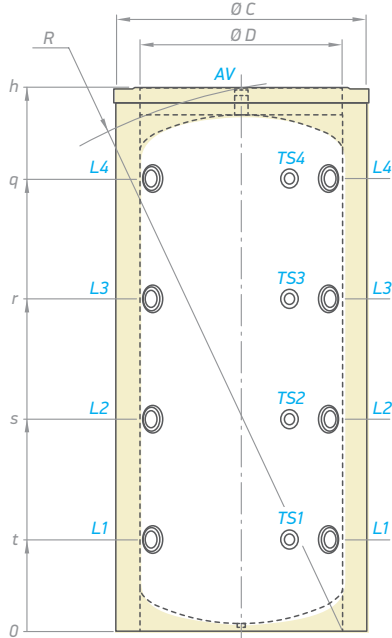

MODELS		TESY V 800 99 P4	TESY V 1000 99 P4	TESY V 1500 120 P4	TESY V 2000 130 P4
TS1	thermo pocket level 1	G1/2	G1/2	G1/2	G1/2
TS2	thermo pocket level 2	G1/2	G1/2	G1/2	G1/2
TS3	thermo pocket level 3	G1/2	G1/2	G1/2	G1/2
TS4	thermo pocket level 4	G1/2	G1/2	G1/2	G1/2
AV	opening for air ventilation	G1 1/2	G1 1/2	G1 1/2	G1 1/2
L1	level 1	G1 1/2	G1 1/2	G2	G2
L2	level 2	G1 1/2	G1 1/2	G2	G2
L3	level 3	G1 1/2	G1 1/2	G2	G2
L4	level 4	G1 1/2	G1 1/2	G2	G2

Thread designations according to EN ISO 228-1!

Dimensions ±5mm		TESY V 800 99 P4	TESY V 1000 99 P4	TESY V 1500 120 P4	TESY V 2000 130 P4
h	mm	1947	2125	2219	2413
q	mm	1500	1775	1730	1896
r	mm	1120	1304	1297	1413
s	mm	740	833	864	930
t	mm	360	362	431	447
R	mm	2178	2347	2426	2735
ØC	mm	990	990	1200	1300
ØD	mm	790	790	1000	1100

EXAMPLE OF INSTALLATION AND CONNECTION

